epati








Hotspot Service Local User Configuration

Summary

RADIUS (Remote Authentication Dial In User Service) is a protocol that allows users who access the networks to perform authentication, authorization, and accounting.

Network Topology

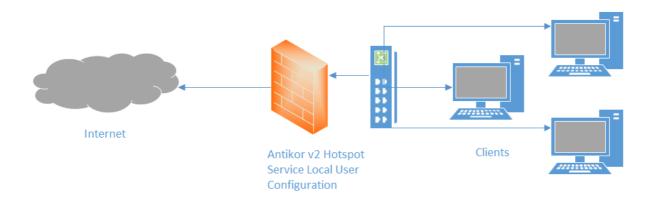


Configuration


Firstly, click the Hotspot Clients under the Defination menu.




Click on the "Add" button, entered user ip or ip group and description, later "Save" button. Click after "Save" button is created hotspot client or group.

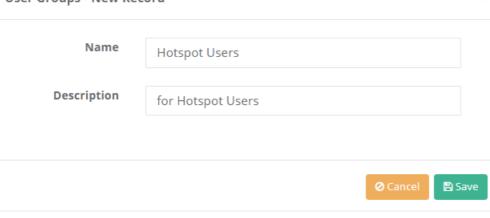

In the next step should be created Local users. Click, the Local User, under the Authentication Rules menu, after click "Add" button the relevant fields are filled in and "Save" button.

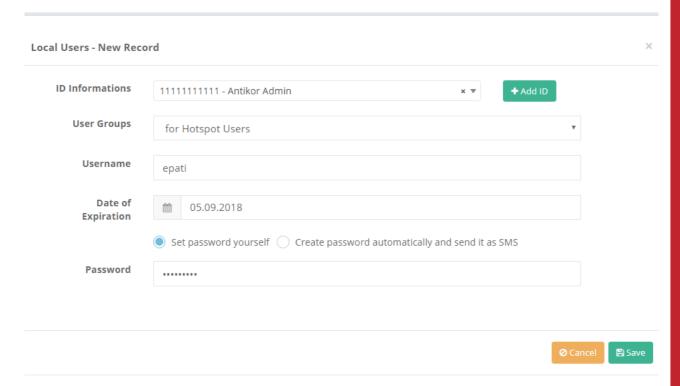

Click, the Verification Rules under the Authentication Rules menu. Then do the following with sequence.

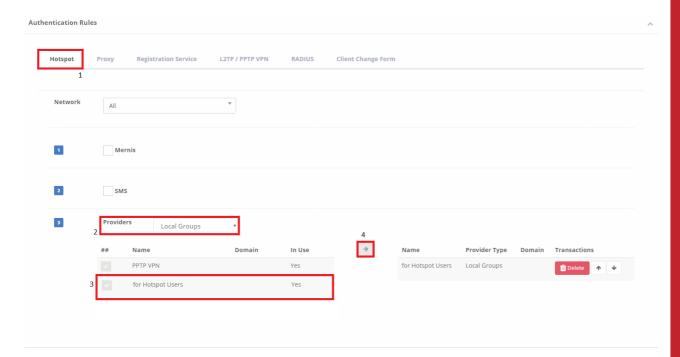

When Hotspot Clients try to reach the internet;



Antikor v2.0

Username	epati

Password

Login

Change Password

Epati Information Techonology

The connection is complete as shown below.

Hotspot Client Screen

Unlimited Size

User Name: epati Active IP(s): 10.2.1.12

used at the session used at teh period

1 saniye 1 saniye 0 B 0 B

Remaining QuotaRemaining to be resetUnlimited Time6 saat, 18 dakika, 22 saniye

Transfer screen to small window

Close all sessions

ePati Cyber Security Technologies Inc.

Mersin Universitesi Ciftlikkoy Kampusu Teknopark Idari Binasi Kat: 4 No: 411 Zip Code: 33343 Yenisehir / MERSIN / TURKIYE ♦ www.epati.com.tr⋈ info@epati.com.tr+90 324 361 02 33♣ +90 324 361 02 39

