## epati








## **Virtual Wire**

A firewall is being set up by connecting two ethernet virtual wire to each other. Virtual wire makes it easy to install and configure a firewall, as you can add it to an existing topology without assigning MAC or IP addresses to firewall interfaces, redesigning the network, or reconfiguring surrounding network devices.



## **Virtual Wire - New Record**

Virtual Wire - New Record

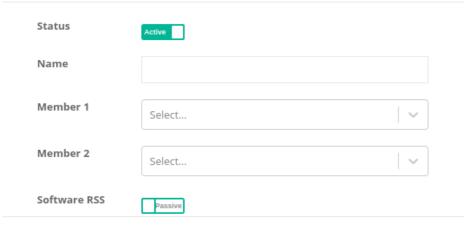



FIELD	DESCRIPTION
Statu	The state of being active or passive is selected.
Name	It is called a virtual wire.
Membe r 1	The first ethernet member is selected for the virtual wire.
Membe r 2	The second ethernet member is selected for the virtual wire.
Softw are RSS	The ethernets belonging to the members to be selected are activated if they are not the same brand or model. Activation of software RSS leads to a decrease in performance. For this reason, it is recommended to perform virtual wire dec between the same brand and model ethernets.





текпорагк тоагт втпазт кат: 4 гvo: 4 г г Zip Code: 33343 Yenisehir / MERSIN / TURKIYE

