


epati

Tunnel

Product: Antikor v2 - Layer2 Tunnel


Guides

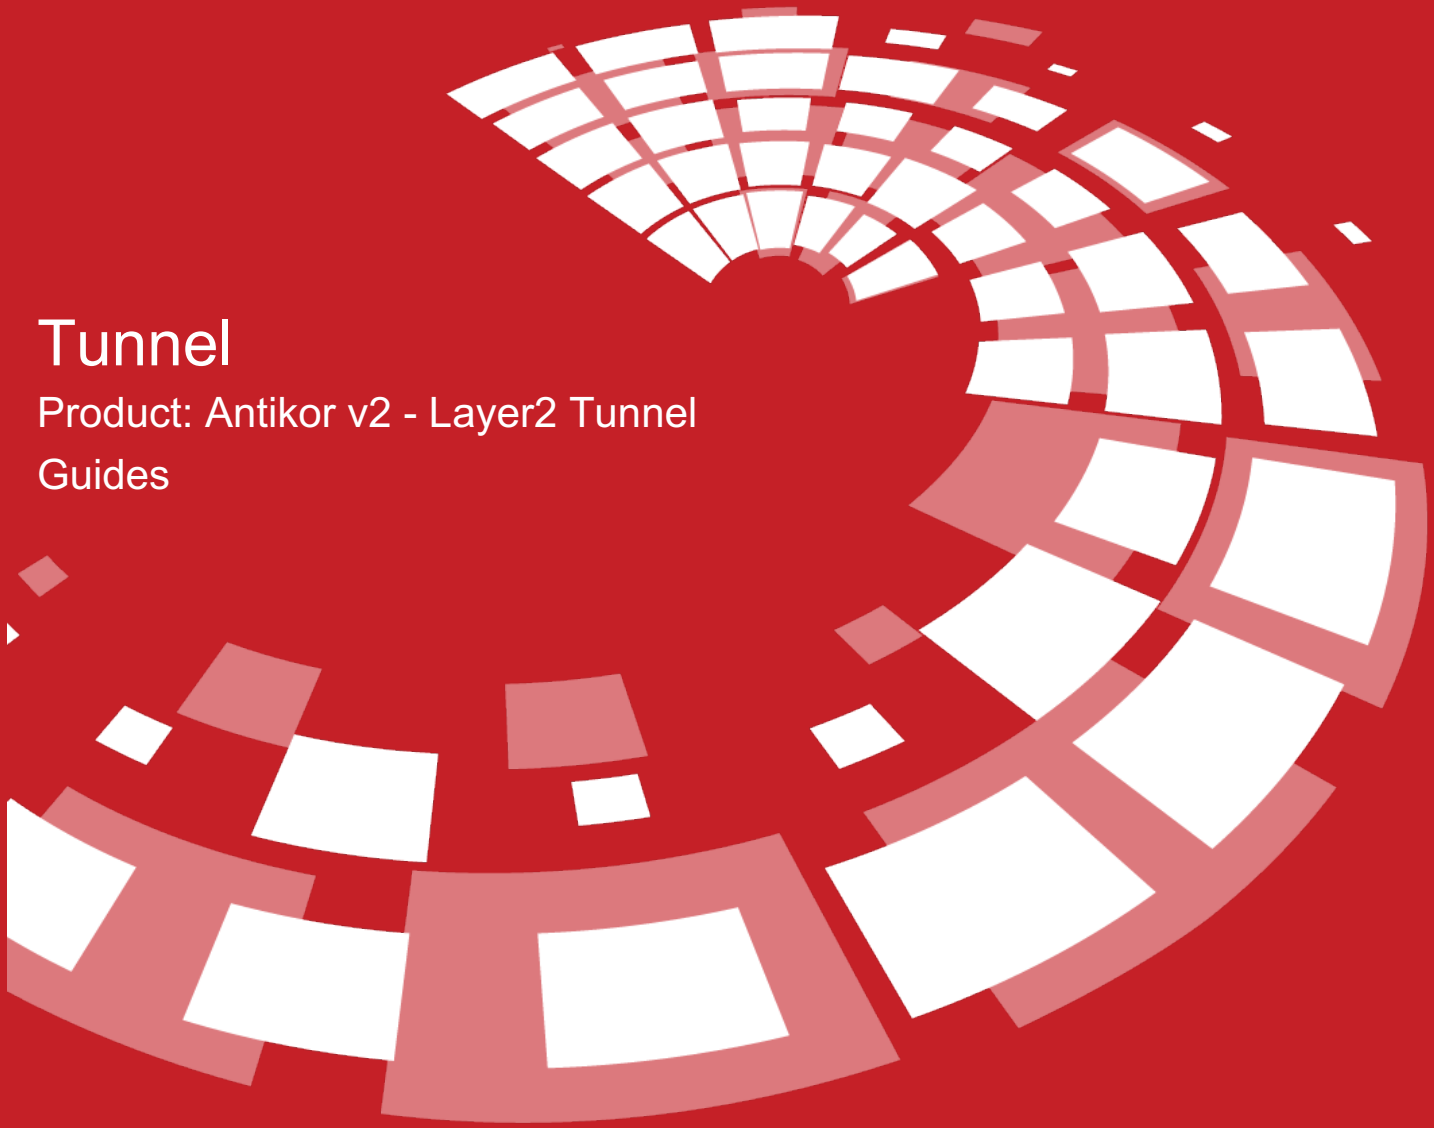


Tunnel

Tunnel Settings

First, click the Tunnel Settings under the Tunnel configuration menu.

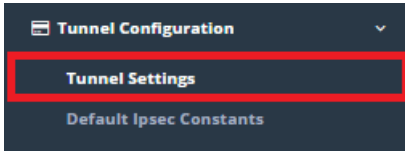

On this page, a switch must be added which has tunnel configuration by the 'Add Switch' button.

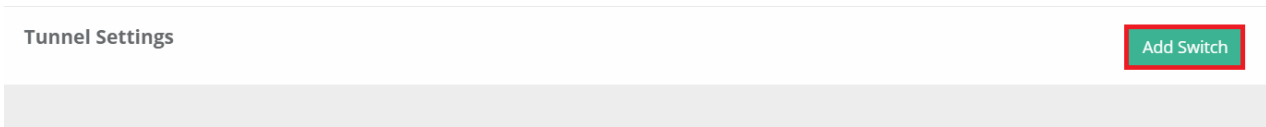

Switch - New Record x

Name

Description

Cancel Save

Field	Description
Name	Enter switch name.
Description	Enter description.

After, click Add Tunnel.



General Settings

Status Active

Tunnel Settings

Port Type Single Port LACP

Group Name

Tunnel Name

Tunneling Mode

Active - Tunnel

IPSec Encryption Passive

Compatibility Mode Passive

VLAN Settings

VLAN Mode

VLAN ID

VLANs (Trunk)

Clear

Native VLAN



Field	Description
Status	Specify the Active/Passive state.
Switch	Switch must be selected.
Port Type	Single Port or LACP must be selected.
LACP Name	If Port Type selected as LACP, enter LACP name.
Group Name	If Port Type selected as Single Port, enter Single Port name.
Tunnel Name	Enter the name of the tunnel.
Tunnelling Mode	Active Tunnel: If a connection has been provided without 'NAT' between two tunnels select this mode. Passive Server: Passive Client:
Active Tunnel	Remote Tunnel IP Address: Enter Remote Tunnel WAN IP Address. WAN Interface: Select the WAN Interface to be tunneled.
IPSec Encryption	If you desire IPSec encryption this option must be selected and pre-shared key must be entered.
Compatibility Mode	Compatibility mode must be activated to work compatible with Antikor-Tünel İstemci v2 products.
VLAN Mode	Untag: If only a single VLAN needs to be moved, this option must be selected and the VLAN ID must be entered. Hybrid: If multiple VLAN and Native VLAN needs to be moved, this option must be selected. You do not need to describe Native VLAN.
VLAN ID	Enter the ID information of the single VLAN which needs to be moved.
VLANlar (Trunk)	Enter the ID of the VLANs which needs to be moved.(Untag or Hybrid must be selected)
Native VLAN	Enter the ID of the Native VLAN which needs to be moved.

After tunnel settings are completed, click the 'Add Physical Port' button.

Network

Add Tunnel

Add Physical Port



Status Active

Port Type Single Port LACP

Group Name

Ethernets

MTU

VLAN Mode

VLAN ID

VLANs (Trunk)

Clear

Native VLAN

Single Port




Field	Description
Status	Specify the Active/Passive state.
Switch	Switch must be selected.
Port Type	Single Port must be selected.
Group Name	Enter Group Name.
Ethernets	IP-free Ethernet must be selected in this field.
MTU	Default MTU value is 1500, It can be changed.
VLAN Mode	Untag: If only a single VLAN needs to be moved, this option must be selected and the VLAN ID must be entered. Hybrid: If multiple VLAN and Native VLAN needs to be moved, this option must be selected. You do not need to describe Native VLAN.
VLAN ID	Enter the ID information of the single VLAN which needs to be moved.
VLANlar (Trunk)	Enter the ID of the VLANs which needs to be moved.(Untag or Hybrid must be selected)
Native VLAN	Enter the ID of the Native VLAN which needs to be moved.

LACP

Field	Description
Status	Specifying the Active/Passive state.
Switch	Switch must be selected.
Port Type	LACP must be selected.
LACP Name	Enter LACP Name.
Ethernets	IP-free Ethernet must be selected in this field.
MTU	Default MTU value is 1500, it can be changed.
VLAN Mode	Untag: If only a single VLAN needs to be moved, this option must be selected and the VLAN ID must be entered. Hybrid: If multiple VLAN and Native VLAN needs to be moved, this option must be selected. You do not need to describe Native VLAN.
VLAN ID	Enter the ID information of the single VLAN which needs to be moved.
VLANlar (Trunk)	Enter the ID of the VLANs which needs to be moved.(Untag or Hybrid must be selected)
Native VLAN	Enter the ID of the Native VLAN which needs to be moved.

Network

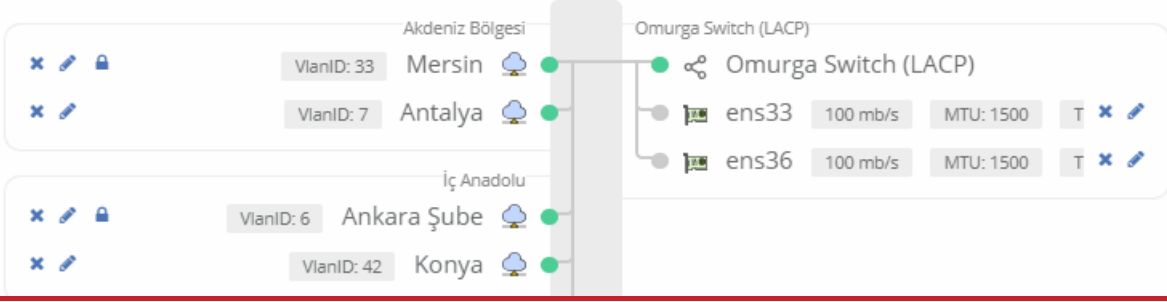[Add Tunnel](#)[Add Physical Port](#)

ePati Cyber Security Technologies Inc.
Mersin Üniversitesi Ciftlikkoy Kampusu
Teknopark İdari Binası Kat: 4 No: 411
Zip Code: 33343 Yenisehir / MERSİN / TÜRKİYE

www.epati.com.tr
info@epati.com.tr
+90 324 361 02 33
+90 324 361 02 39

