epati

Honeypot Settings

Product: Antikor v2 - Next Generation Firewall

Guides

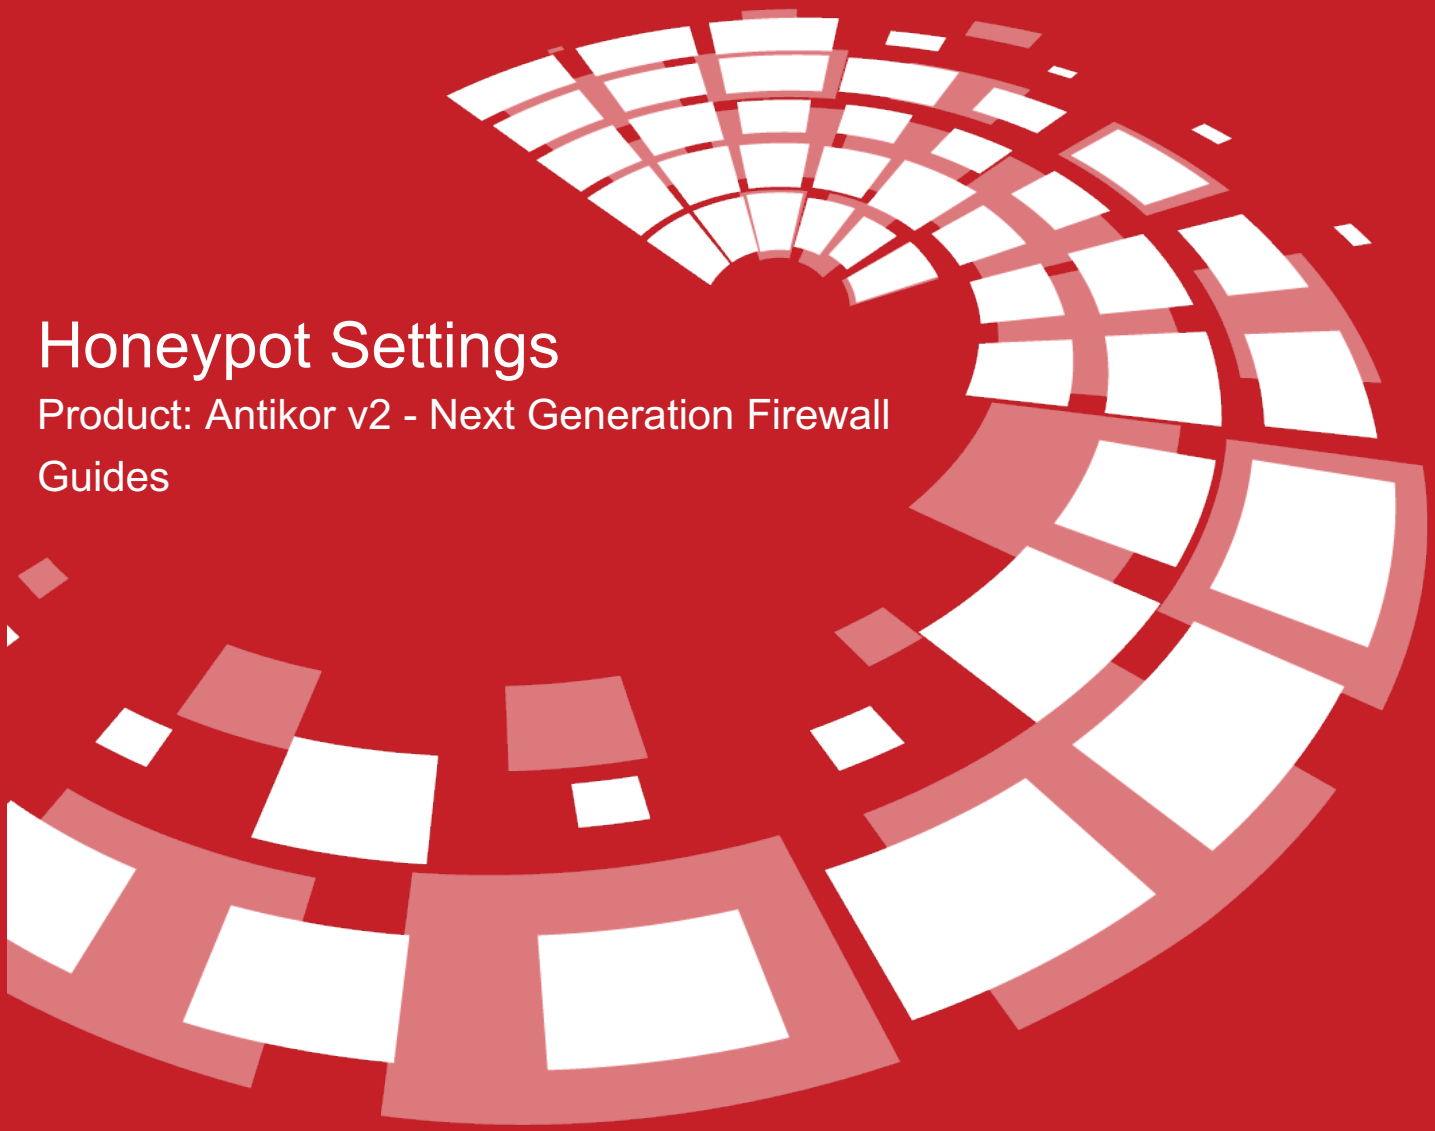

www.epati.com.tr

Honeypot Settings

They are traps set up to detect attacks against information systems. Although the services that it “appears to provide” on the matchine that it is installed varries depending on types of attacks that it attempts to get them into tramp, the basic logic of Honeypots is to lure intruders (automatized or manually induced) to networks where they are involved thereby raising awareness.
Since the machines that undertake this task do not offer any valid service, any traffic directed to them should be considered as suspicious and should be examined.

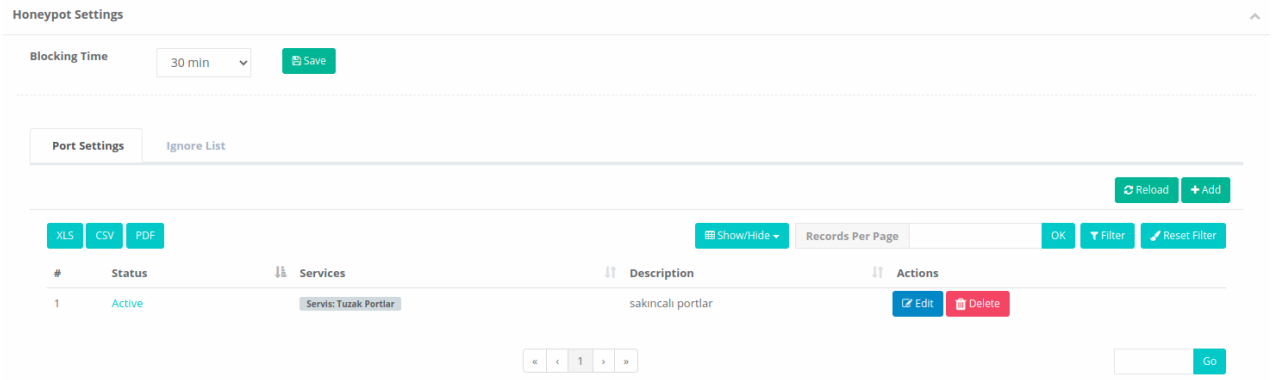

FIELD	DESCRIPTION
Prohibition Period	Enter prohibition period.

Honeypot Settings - New Record

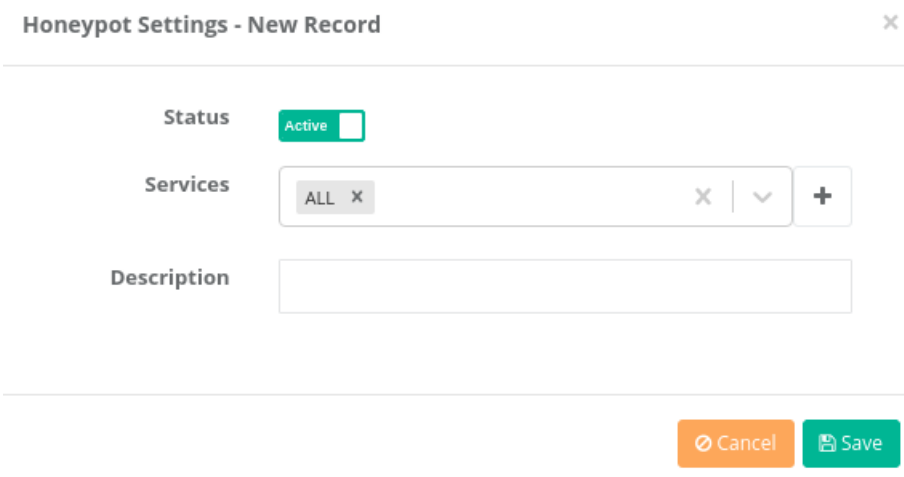

FIELD	DESCRIPTION
Status	Choose either active or passive as status.
Services	Enter services to be used for Honeypot.
Description	Enter description.

Ignored

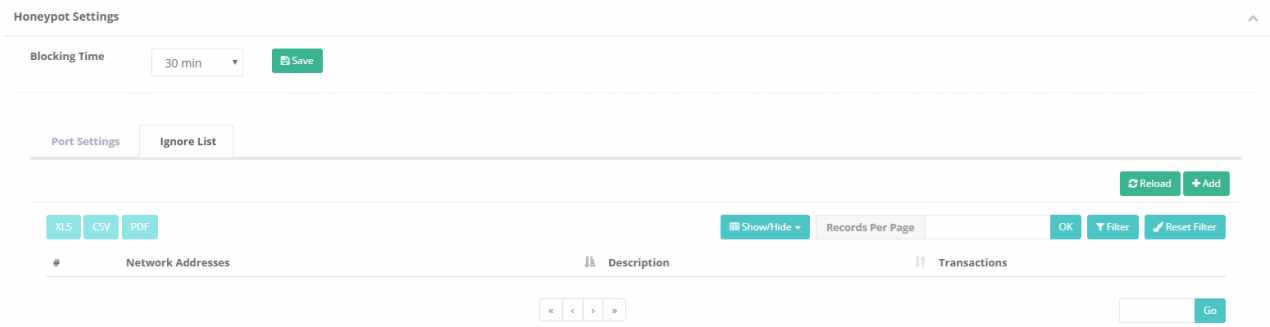

Ignored New Record

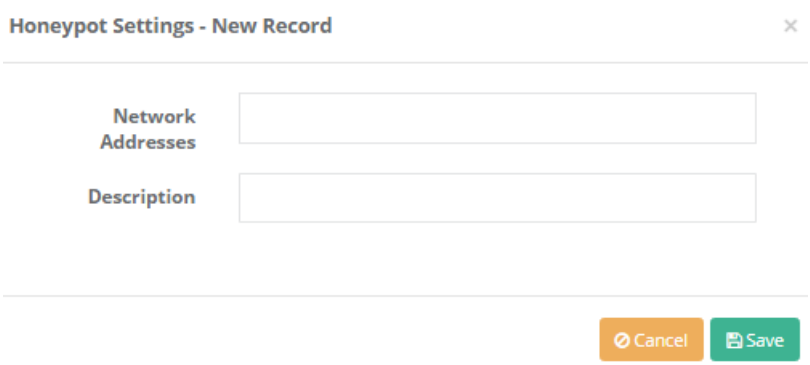

FIELD	DESCRIPTION
Network Addresses	Enter network addresses that will not be blocked by Honeypot.
Description	Enter description.